


SDA-系列，驱动头

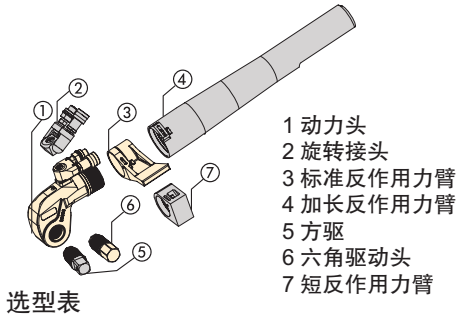

选型表

最大扭矩
34079 Nm

方驱尺寸范围
3/4-2 1/2 inches

内六角驱动头尺寸
14-85 mm

适用于
S系列
扳手



| 扳手型号 | 可选方驱 英制 | | | | 可选方驱 公制 | | | | 标准反作用力臂 | | | |
|----------------------|------------|--------------|----------------------------|------------|------------------|--------------|----------------------------|-----------|------------------|--------|------------|-----|
| | 型号 | 六角尺寸 (in) | 最大扭矩 ¹⁾ (Nm) | 型号 | 尺寸 B1 (mm) | 六角尺寸 (mm) | 最大扭矩 ¹⁾ (Nm) | 型号 | 尺寸 B1 (mm) | 型号 | 尺寸 (mm) | |
| S1500 (1898 Nm) | | 1/2 | 481 | SDA15-008 | 66 | 14 | 644 | SDA15-14 | 66 | SRA15 | 67.5 | 65 |
| | | 5/8 | 935 | SDA15-010 | 67 | 17 | 1152 | SDA15-17 | 68 | | | |
| | | 3/4 | 1619 | SDA15-012 | 71 | 19 | 1606 | SDA15-19 | 70 | | | |
| | | 7/8 | 1897 | SDA15-014 | 74 | 22 | 1897 | SDA15-22 | 73 | | | |
| | | 1 | 1897 | SDA15-100 | 77 | 24 | 1897 | SDA15-24 | 74 | | | |
| S3000 (4339 Nm) | | 5/8 | 935 | SDA30-010 | 77 | 17 | 1152 | SDA30-17 | 77 | SRA30 | 80.0 | 74 |
| | | 3/4 | 1619 | SDA30-012 | 80 | 19 | 1606 | SDA30-19 | 79 | | | |
| | | 7/8 | 2568 | SDA30-014 | 83 | 22 | 2486 | SDA30-22 | 82 | | | |
| | | 1 | 3828 | SDA30-100 | 86 | 24 | 3232 | SDA30-24 | 84 | | | |
| | | 1 1/8 | 4336 | SDA30-102 | 88 | 27 | 4336 | SDA30-27 | 85 | | | |
| | | 1 1/4 | 4336 | SDA30-104 | 89 | 30 | 4336 | SDA30-30 | 87 | | | |
| | | - | - | - | - | 32 | 4336 | SDA30-32 | 88 | | | |
| S6000 (8144 Nm) | | 5/8 | 935 | SDA60-010 | 85 | 17 | 1152 | SDA60-17 | 86 | SRA60 | 91.5 | 89 |
| | | 3/4 | 1619 | SDA60-012 | 89 | 19 | 1606 | SDA60-19 | 88 | | | |
| | | 7/8 | 2568 | SDA60-014 | 92 | 22 | 2486 | SDA60-22 | 91 | | | |
| | | 1 | 3828 | SDA60-100 | 95 | 24 | 3232 | SDA60-24 | 93 | | | |
| | | 1 1/8 | 5454 | SDA60-102 | 97 | 27 | 4600 | SDA60-27 | 94 | | | |
| | | 1 1/4 | 7480 | SDA60-104 | 98 | 30 | 6308 | SDA60-30 | 96 | | | |
| | | - | - | - | - | 32 | 7656 | SDA60-32 | 97 | | | |
| S11000 (14914 Nm) | | 1 1/4 | 7480 | SDA110-104 | 115 | 30 | 6308 | SDA110-30 | 112 | SRA110 | 127.5 | 106 |
| | | 1 3/8 | 9953 | SDA110-106 | 117 | 32 | 7656 | SDA110-32 | 114 | | | |
| | | 1 1/2 | 12920 | SDA110-108 | 118 | 36 | 10894 | SDA110-36 | 117 | | | |
| | | 1 5/8 | 14905 | SDA110-110 | 122 | 41 | 14905 | SDA110-41 | 121 | | | |
| | | 1 3/4 | 14905 | SDA110-112 | 125 | 46 | 14905 | SDA110-46 | 127 | | | |
| S25000 (34079 Nm) | | 1 1/2 | 12920 | SDA250-108 | 141 | 36 | 10894 | SDA250-36 | 140 | SRA250 | 158.5 | 135 |
| | | 1 5/8 | 16423 | SDA250-110 | 145 | 41 | 16098 | SDA250-41 | 144 | | | |
| | | 1 3/4 | 20508 | SDA250-112 | 148 | 46 | 22730 | SDA250-46 | 148 | | | |
| | | 1 7/8 | 25230 | SDA250-114 | 149 | 50 | 29194 | SDA250-50 | 151 | | | |
| | | 2 | 30617 | SDA250-200 | 151 | 55 | 34437 | SDA250-55 | 154 | | | |
| | | 2 1/4 | 34437 | SDA250-204 | 154 | 60 | 34437 | SDA250-60 | 158 | | | |
| | | - | - | - | - | 65 | 34437 | SDA250-65 | 161 | | | |
| | | - | - | - | - | 70 | 34437 | SDA250-70 | 164 | | | |
| | | - | - | - | - | 75 | 34437 | SDA250-75 | 168 | | | |
| | | - | - | - | - | 85 | 34437 | SDA250-85 | 175 | | | |

¹⁾ 根据螺栓的大小和等级确定最大扭矩